



# DRUM THICKENER

*Thickening of municipal and industrial sludge*



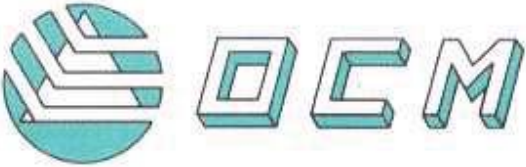

**HIGH THICKENING EFFICIENCY**

## DRUM THICKENER "BR" Line



Model		BR 10	BR 20	BR 30	BR 50	BR 70	BR 100
Sludge capacity (0.3+1.0% DS)	m <sup>3</sup> /h	3÷14	5÷24	10÷36	20÷56	30÷80	40÷110
Drum diameter	mm	700	700	900	900	1400	1400
Drum length	mm	800	1500	2500	3500	3500	4500
Belt washwater	m <sup>3</sup> /h	0.6	1.0	1.5	2.2	2.2	2.8
Drum thickener power	kW	0.55	0.55	1.5	1.5	2.2	2.2
Washpump power	kW	3.0	4.0	4.0	5.5	5.5	7.5
Empty weight	kg	400	600	1300	1600	2200	2500

Drum thickener BR line are enable to thikening organic and inorganic sludges. AISI 304 or 316 stainless steel construction. They have a lower power consumption, moreover they are able to assure high thickening efficiency and easy maintenance.

<p>MANUFACTURER</p>  <p>O.C.M. srl - ITALY</p>	<p>HANDED OVER BY:</p>  <p>UAB "FinEco Ltd"                  Verkių g. 34a LT-08221                  Vilnius, Lithuania                  Tel./fax: +370 5 277 3620                  Mob.: +370 679 78886</p> <p><a href="mailto:info@fineco.lt">info@fineco.lt</a>  <a href="http://www.fineco.lt">www.fineco.lt</a></p>
---	--